


| ITEM NO. | PART NUMBER | DESCRIPTION   | QTY. | NOTES          |
|----------|-------------|---|------|----------------|
| 1        | TLY-1P      | NEMA 1-15P, polarized                                       | 1    | black overmold |
| 2        | TLY-22S     | C7  | 1    | black overmold |
| 3        | 30-00246    | Wire, 2C, 18 AWG, UL SPT-2, 300V, 105°C, 7.05 mm, VW-1, PVC | 1    |                |

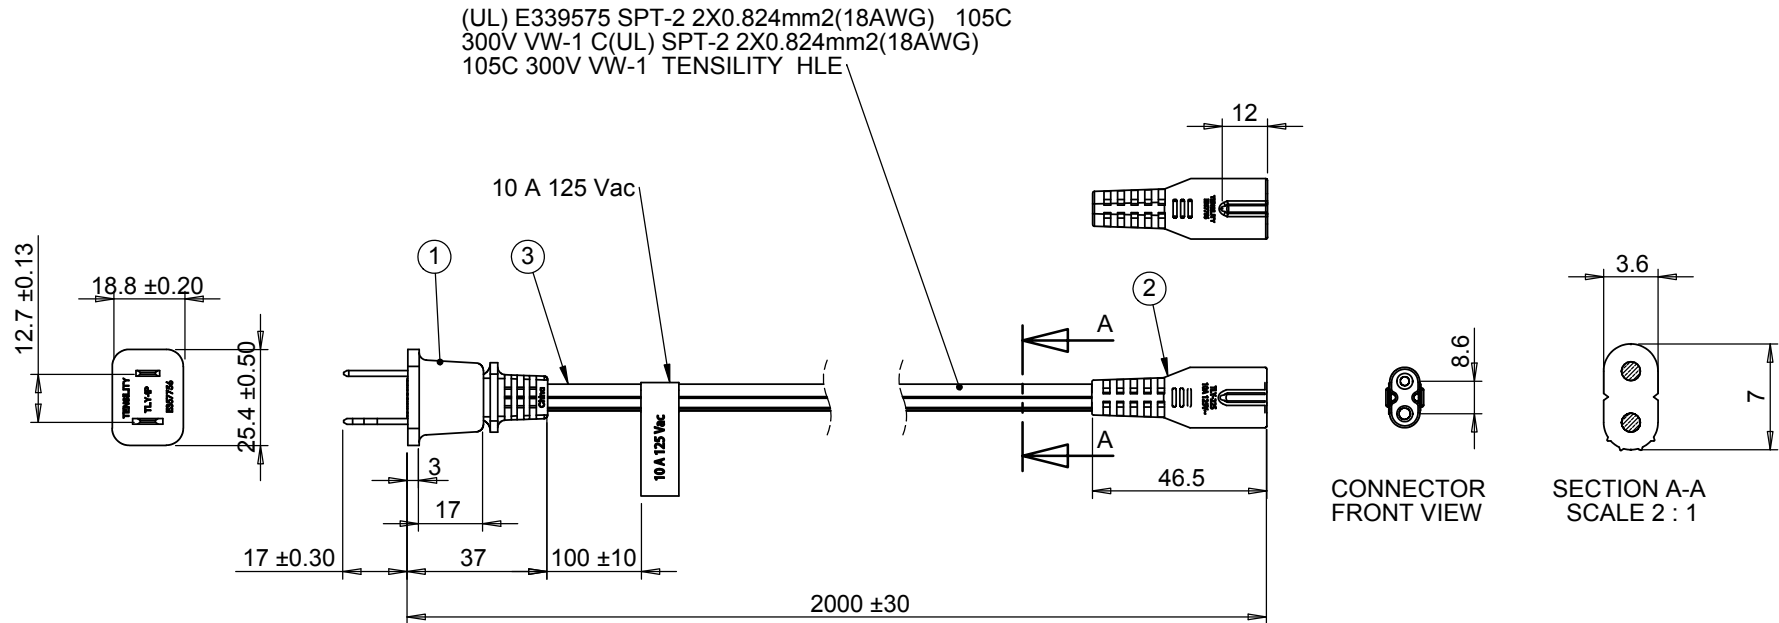

| Revision | Date       | Description     | Notes  |  | <h1>TENSILITY</h1> <p>20802 Sockeye Place #130<br/> Bend, OR 97701 USA<br/> tel 541.323.3228 fax 541.323.4202<br/> 800 877.670.7118 www.tensility.com</p> |          |              |
|----------|------------|-----------------|--|--|---|----------|--------------|
| A        | 12/20/2012 | Initial release | Rated for 10 A at 125 Vac<br>RoHS, REACH and Dodd-Frank conflict materials compliant<br>Function test: no open, no reversed polarity, no short circuit, no INT |  |   |          |              |
|          |            |                 | DIMENSIONS ARE IN MILLIMETERS<br>TOLERANCES:<br>X: ± 0.5 mm<br>X.X: ± 0.3 mm<br>X.XX: ± 0.05 mm  |  | A   | 11-00027 |              |
|          |            |                 | DESCRIPTION:<br>Ac cord, 2000 mm, U.S, NEMA 1-15P plug, TLY-1P to C7, TLY-22S, 18 AWG, SPT-2 wire, 30-00246  |  | SCALE:1:2   | WEIGHT:  | SHEET 1 OF 1 |